



SOLAR STIK®

Category: Power Generation

125W Flexible Solar Panel

24VDC Item # 11-0402015

General

Certification	MIL-STD-810G tested and approved for deployment in austere operating conditions
---------------	---

Solar Panel @ STC*


Rated Power	150 W
Rated Voltage at MPP	31 VDC
Rated Current at MPP	4.8 A
Open Circuit Voltage	39 V
Short Circuit Current	5.6 A

Performance Specifications


Temperature Coefficient for Power (%/ °C)	-0.43
Temperature Coefficient for Voltage (%/ °C)	-0.38
Temperature Coefficient for Voc (%/ °C)	-0.33
Temperature Coefficient for Isc (%/ °C)	-0.03
Cell Temperature Operating Range	-40 to 185 °F (-40 to 85 °C)
Voltage, Open Circuit @ -40 °F (-40 °C)	56 V
Voltage, Vmpp @ 122 °F (50 °C)	29.7 V
Voltage, Vmpp @ 167 °F (75 °C)	26.75 V

Weights and Dimensions (L x W x H)

Solar Panel Weight	3.25 lb (1.48 kg)
Power to Weight Ratio	38.5 W/lb (84.5 W/kg)
Solar Panel Dimensions	Folded: 10.25 x 12.5 x 1.75 in (26.035 x 31.75 x 4.445 cm) Deployed: 63.75 x 39.625 x 0.04 in (161.925 x 100.65 x 0.1 cm)
Max. Deployed Thickness at J-Box	0.5 in (1.27 cm)

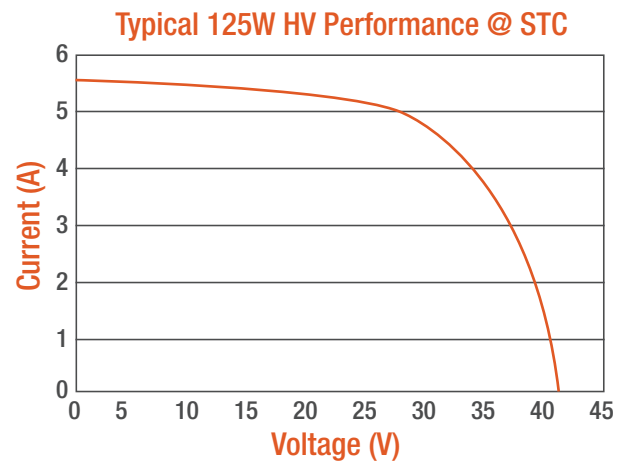

Panel Color Options



Black

Woodland Camo

Multicam

Desert Camo

*Electrical Characteristics - tested at Standard Test Conditions (STC): irradiance level 1000W/m², spectrum AM 1.5 and cell temperature 77 °F (25 °C). Tolerance +/-15%. The performance of this product may increase by up to ~5% after the first several hours of exposure to sunlight.

Recommended Components and Accessories

15 ft 24VDC Solar Leash – Item # 13-0000050



© 2019 Solar Stik, Inc.
All Rights Reserved. Solar Stik is a registered trademark of Solar Stik, Inc.

SS20190418

800.793.4364
bd@solarstik.com
www.solarstik.com